


Bullseye B175 - 70

Change Instructions



1-800-364-4899 bullseyesdlocks.com

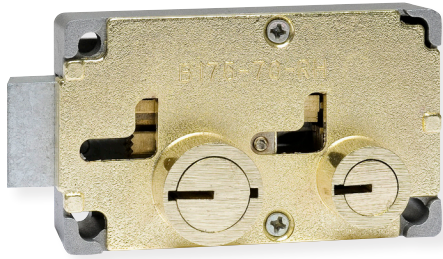

1. Make sure the bolt is retracted and it is in the unlocked position.
2. Loosen the change screw in the back of the lock about 2 1/2 turns.
3. Insert the new guard key and turn it until it stops.
4. Tighten the change screw by hand. The lock is now set. Make sure not to over-tighten the screw. Over-tightening will cause the screw to strip.

NOTE: New locks should be in the unlocked position and set to a neutral guard.